


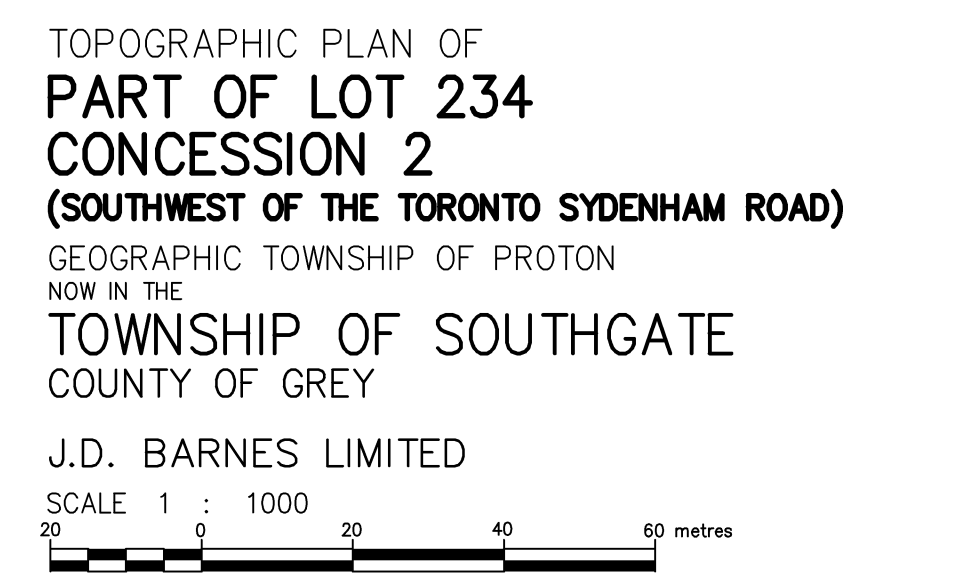

METRIC DISTANCES AND/OR COORDINATES SHOWN ON THIS PLAN ARE IN METRES AND CAN BE CONVERTED TO FEET BY DIVIDING BY 0.3048.

NOTES

BEARINGS ARE UTM GRID, DERIVED FROM OBSERVED REFERENCE POINTS A AND B BY REAL TIME NETWORK (RTN) OBSERVATIONS, UTM ZONE 17, NAD83 (CSRS) (2010.0).

DISTANCES ARE GROUND AND CAN BE CONVERTED TO GRID BY MULTIPLYING BY THE COMBINED SCALE FACTOR OF 0.999956.

FOR BEARING COMPASSONS, A ROTATION OF 00°24'45" COUNTER-CLOCKWISE WAS
APPLIED TO BEARINGS ON PLAN P6.
A ROTATION OF 00°02'50" COUNTER-CLOCKWISE WAS
APPLIED TO BEARINGS ON P1 AND P3.
A ROTATION OF 00°02'50" COUNTER-CLOCKWISE WAS
APPLIED TO BEARINGS ON P2.
A ROTATION OF 00°25'50" COUNTER-CLOCKWISE WAS
APPLIED TO BEARINGS ON P4.
A ROTATION OF 00°25'50" COUNTER-CLOCKWISE WAS
APPLIED TO BEARINGS ON P5.
A ROTATION OF 00°25'50" COUNTER-CLOCKWISE WAS
APPLIED TO BEARINGS ON P7.

ALL SET SS8 AND PB MONUMENTS WERE USED DUE TO LACK OF OVERBURDEN
AND FOR PROXIMITY TO THE UNDERGROUND UTILITIES IN ACCORDANCE WITH
SECTION 11.4 (f) OF OREG. 526/91.

[illegible]